


表1 各部寸法

呼び		L	F1	F2	D1	D2	L1	L2	Rca	Rcb	t
B ①×②	A ①×②										
21/2×1/2	65×15	65	91	30	86	27	23	11	Rc21/2	Rc1/2	4.5
21/2×3/4	65×20	65	91	36	86	33	23	13	Rc21/2	Rc3/4	4.5
21/2×1	65×25	65	91	44	86	41	23	15	Rc21/2	Rc1	4.5
21/2×11/4	65×32	65	91	53	86	50	23	17	Rc21/2	Rc11/4	4.5
21/2×11/2	65×40	65	91	60	86	56	23	18	Rc21/2	Rc11/2	4.5
21/2×2	65×50	65	91	73	86	69	23	20	Rc21/2	Rc2	4.5
*3×1/2	80×15	72	105	30	99	27	25	11	Rc3	Rc1/2	5
3×3/4	80×20	72	105	36	99	33	25	13	Rc3	Rc3/4	5
3×1	80×25	72	105	44	99	41	25	15	Rc3	Rc1	5
3×11/4	80×32	72	105	53	99	50	25	17	Rc3	Rc11/4	5
3×11/2	80×40	72	105	60	99	56	25	18	Rc3	Rc11/2	5
3×2	80×50	72	105	73	99	69	25	20	Rc3	Rc2	5
3×21/2	80×65	72	105	91	99	86	25	23	Rc3	Rc21/2	5
*4×3/4	100×20	85	133	36	127	33	28	13	Rc4	Rc3/4	6
*4×1	100×25	85	133	44	127	41	28	15	Rc4	Rc1	6
*4×11/4	100×32	85	133	53	127	50	28	17	Rc4	Rc11/4	6
*4×11/2	100×40	85	133	60	127	56	28	18	Rc4	Rc11/2	6
4×2	100×50	85	133	73	127	69	28	20	Rc4	Rc2	6
4×21/2	100×65	85	133	91	127	86	28	23	Rc4	Rc21/2	6
4×3	100×80	85	133	105	127	99	28	25	Rc4	Rc3	6
*5×11/2	125×40	95	161	60	154	56	30	18	Rc5	Rc11/2	6.5
*5×2	125×50	95	161	73	154	69	30	20	Rc5	Rc2	6.5
*5×21/2	125×65	95	161	91	154	86	30	23	Rc5	Rc21/2	6.5
5×3	125×80	95	161	105	154	99	30	25	Rc5	Rc3	6.5
5×4	125×100	95	161	133	154	127	30	28	Rc5	Rc4	6.5
*6×2	150×50	105	189	73	182	69	33	20	Rc6	Rc2	7.5
*6×21/2	150×65	105	189	91	182	86	33	23	Rc6	Rc21/2	7.5
*6×3	150×80	105	189	105	182	99	33	25	Rc6	Rc3	7.5
6×4	150×100	105	189	133	182	127	33	28	Rc6	Rc4	7.5
6×5	150×125	105	189	161	182	154	33	30	Rc6	Rc5	7.5

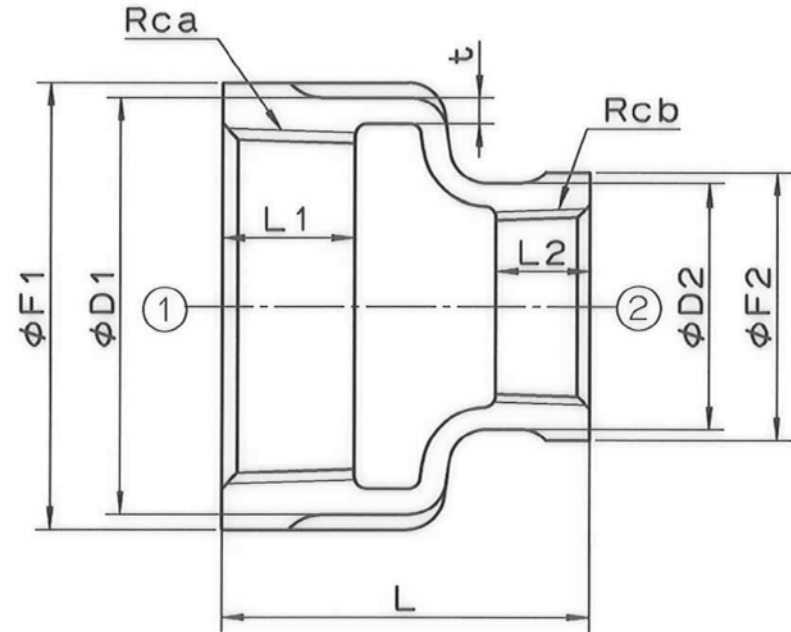

- 注3: 表1の中で\*付きのものは、JIS B 2301の規格外品である。
- 注2: Rcねじの詳細は、JIS B 0203による。
- 注1: 継手本体の詳細は、JIS B 2301による。

継手本体		FCMB275-5		
品番	品名	数量	材質	備考
寸法	21/2~6 <sup>B</sup>		日本継手株式会社	
名称	縁付径違いソケット	規格	BRS	
図名	ねじ込み式可鍛鋳鉄製管継手 (JIS継手)	図番	H-0022	改訂 1 2019.12.11